
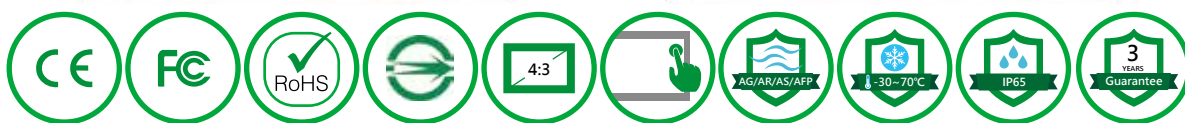


MD-150P

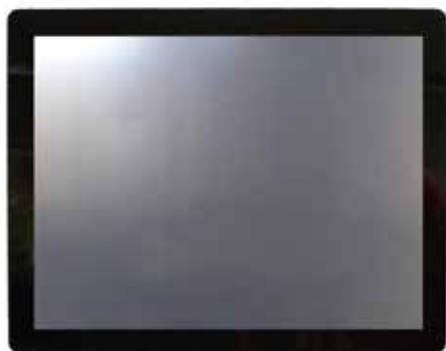

- 15" 1024x768 (XGA) Resolution
- Wide Operating Temperature (-30~70° C)
- Metal Cabinet with Diverse Installing Options
- Made in Taiwan, 3 Years Warranty
- Designed for All Environments
- High Brightness Option
- AG/AR/AF Film Options
- All Kind of Connectors Option (VGA/DVI/HDMI/DP)

I/O Interfaces

Standard	VGA x1, DVI x1
Audio Input	TRS connector 3.5mm of stereo x1
Speaker	2W x2

Mechanical

Cabinet	Galvanized steel (SECC)
Dimension (Max)	348.4x272.4x43.3 mm
Wall Mount Hole	VESA 75x75 mm
Net Weight	≤ 3.44 KG

Power

Power Input	DC-12V, with AC/DC Adapter
Power Connector	DC Jack Φ2.1mm

Environmental

Operating Temperature	-30-70°C
-----------------------	----------


General

Screen Diagonal	15.0 inch
Display Area	304.1x228.1mm
Resolution	1024x768 (XGA)
Brightness(nits)	300
Contrast Ratio	2500:1
Display Ratio	4:3
Support Color	16.7M Color
Pixel Pitch	297x297 um
Response Time	21 msec
Backlight Unit	LED (white LED)
Viewing Angle (L/R,U/D)	176° / 176° (IPS)
Backlight Life Time	70000 HRS
Surface Treatment	Anti-glare, Hardness 3H

Option

Brightness	500/1000/1600
Display Input Option	VGA + HDMI + DVI/VGA + HDMI + DP/VGA + HDMI + RS-232
Surface Film Options	AFP(Anti-Fouling/Fingerprint)/AR(Anti-Reflective)/AS(Anti-Spy)
Cabinet Options	Stainless Steel/Aluminum

Dimensions

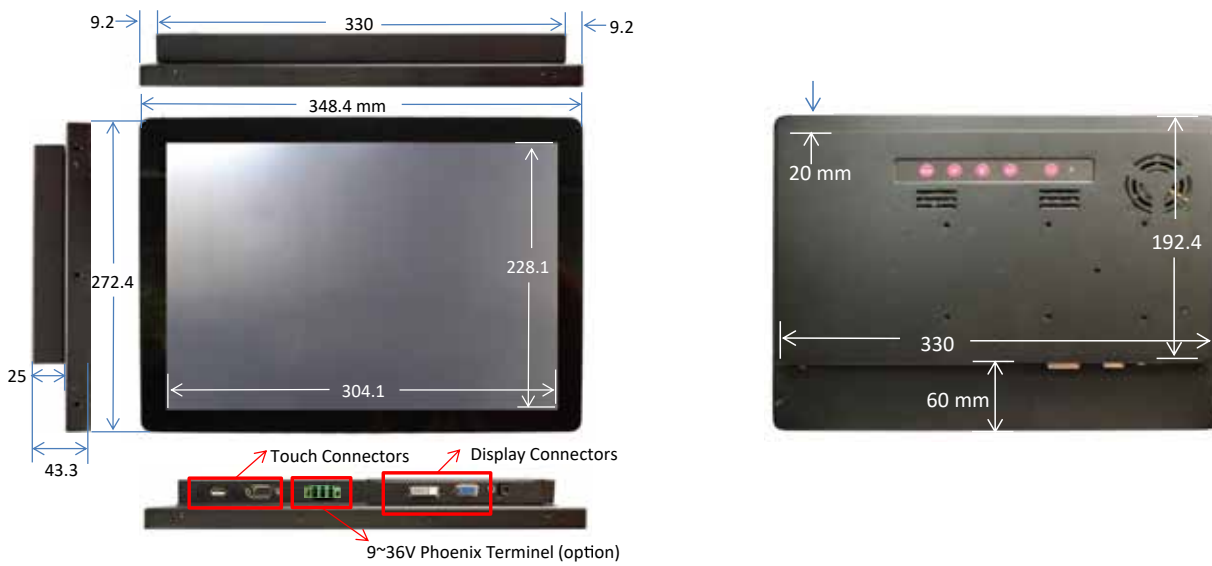

Ordering Information

Monitor

Model Number	AL8-3045
Description/Configuration	15" 1024x768 (XGA 4:3)/Industrial Touch Display/Projected Capacitive Touch/VGA/DVI

Accessories

Model Number	AL8-3046
Description/Configuration	9~36V Adapter for MD-150R/MD-150P/MD-156R/MD-156P/MD-170R/MD-170P/MD-185R/MD-215R/MD-215P



Tel: +886-2-7739-5566
Fax: +886-2-7715-0609
Mail: info@Mitwell.com.tw
Address: No.55, Ln. 6, Chenglin Rd., Tucheng Dist., New Taipei City 236, Taiwan (R.O.C.)